


# REAR BLADE



**NVHL SERIES**

**GETS MORE FOR YOUR FIELD**

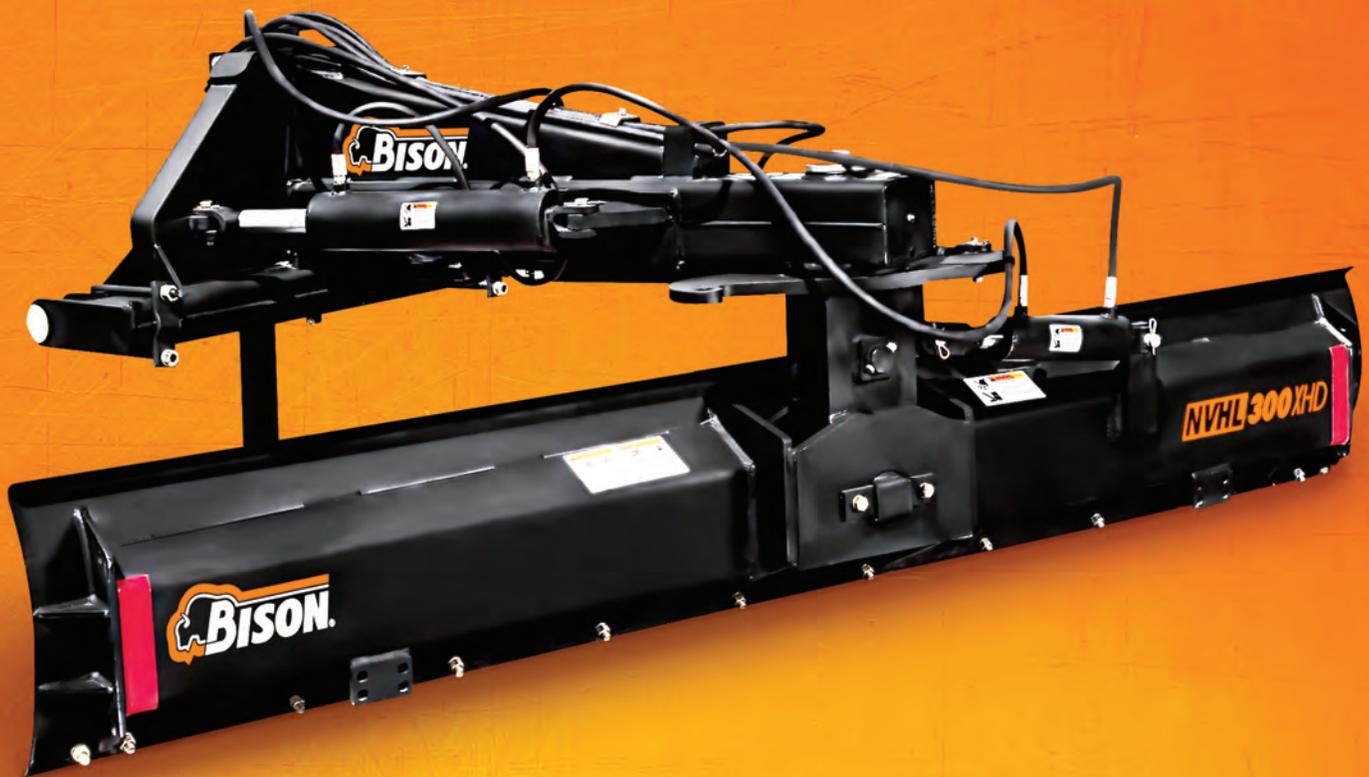



BISON

## REAR BLADE NVHL SERIES



The heavy-duty design and construction of the NVHL Series make them ideal for the most rugged grading jobs. The 8, 9 and 10-foot moldboards are reinforced to withstand the most demanding conditions and can be reversed for backfilling. This top-of-the-line blade is rated for use on tractors up to 160 (2 WD) horsepower and features optional hydraulic controls for precision blade adjustment.

The NVHL Series is ready for heavy duty action and gives you the confidence to tackle the toughest jobs.



360° Total swing angle. The 1/2" x 6" grader-type steel cutting edge is reversible, featuring bevels on both edges for twice the work life, and replaceable for even greater functionality.

Ditching and terracing jobs can be accomplished quickly and easily with optional hydraulic tilt adjustment.



Optional end plates hold in extra material while dragging it from one place to another.

Perfect filling.

Optional skid shoes protect the moldboard cutting edge from hitting low-lying obstructions while cleaning corrals or removing snow.

SPECIFICATIONS		NVHL-240-XHD	NVHL-270-XHD	NVHL-300-XHD
Moldboard width	ft	8'	9'	10'
Approximate weight	lb	1420*/1499**	1470*/1549**	1520*/1598**
King pin diameter	in		4"	
Moldboard height & thickness	in	19" x 5/16" (whit full box frame)		
Cutting edge		1/2" x 6" high carbon-steel blade, reversible, interchangeable		
Maximum tractor hp	hp	160 (2WD) & 145 (4WD)		
Hitch		3 - point cat. II, II quick hitch, III and III quick hitch		
Swing angle		Forward or reverse positions. 4, up to 26° (RH) & 5, up to 38° (LH) (manual) 0° to 43° left or right (hydraulic) <sup>1</sup>		
Offset adjustment	in	0 to 28" right, 0 to 26" left (manual) 0 to 36" left or right (hydraulic) <sup>2</sup>		
Tilt adjustment		2, up to 15° up or down (manual) 0° to 12° up or down (hydraulic) <sup>3</sup>		
Total swing angle	°	360		
Parking stand		Standard		

\*No hydraulic cylinders nor mechanical linkages included.

\*\*Hydraulic cylinders included.

HYDRAULIC ANGLE KIT - includes 4" dia. x 16" stroke, 2" shaft cylinder with 2 - 8" NPT hydraulic hoses.

1 HYDRAULIC OFFSET KIT - includes 4" dia. x 16" stroke, 2" shaft cylinder with 2 - 8" NPT hydraulic hoses.

2 HYDRAULIC TILT KIT - includes 3" dia. x 4 1/2" stroke, 1 1/2" shaft cylinder with 2 - 12" NPT hydraulic hoses.

3

\*Tecnomec Agrícola, S.A. de C.V. reserves the right to modify the specifications whenever it deems necessary without warning.

\*Some of the pictures depict equipment that is not necessarily included as part of the standard machinery.

Contact your BISON dealer and find out the many other options available.

[www.bison.com.mx](http://www.bison.com.mx)  
01 800 52 BISON



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905  
Jesús María, Aguascalientes, México  
Tel. (449) 92-BISON / Fax. (449) 922 4767