

# REAR BLADE



T/F/A SERIES


**GETS MORE FOR YOUR FIELD**





BISON

## REAR BLADE T/F/A SERIES

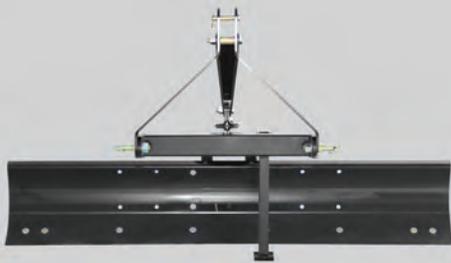

T/LT Series blades are designed for tractors up to 55 hp. Choose between 4 to 8 feet wide moldboards.

NVHF Series blades are the ideal choice for up to 45 hp tractors. Choose between a 5 or 6 feet wide moldboard depending on your needs.



Ideal for light road maintenance, lawn care, gardening, and other light duty landscaping applications.

Offset, angle and tilt options come standard on all models.



End plates allow rear blade to hold in material for filling.

Skid shoes increase the life of the cutting edge and avoid damaging the working surface while cleaning corrals or plowing snow.

Blades can be used year-around for leveling ground, roadside clearing and snow removal.

SPECIFICATIONS		NVHF-152	NVHF-182	NVHF-212
Moldboard width	ft	5'	6'	7'
Approximate weight	lb	250	280	310
King pin diameter	in	2 5/8"		
Moldboard height & thickness	in	12 1/2" x 1/4"		
Cutting edge		1/2" x 6" high carbon-steel blade, reversible, interchangeable		
Maximum tractor hp	hp	55 (2WD) & 50 (4WD)		
Hitch		3 - point category I and I quick hitch <sup>1</sup>		
Swing angle	°	20°, 40° and 60°, left or right. 3 forward and 3 reverse positions		
Offset adjustment	in	0° to 12° left or right		
Tilt adjustment	°	0° to 20° left or right		
Total swing angle	°	360		
Parking stand		Standard		

SPECIFICATIONS		NVH-150-T	NVH-180-T	NVH-210-T	NVH-240-T
Moldboard width	ft	5'	6'	7'	8'
Approximate weight	lb	375	404 (372)	433	462
King pin diameter	in	2 5/8"			
Moldboard height & thickness	in	17" x 1/4"			
Cutting edge	in	1/2" x 6" high carbon-steel blade (3/8" x 4" spring steel blade), reversible, interchangeable			
Maximum tractor hp	hp	65 (2WD) & 60 (4WD)			
Hitch		3 - point category I and I quick hitch <sup>1</sup>			
Swing angle	°	18°, 35° and 53° left or right 3 forward and 3 reverse positions			
Offset adjustment	in	6" or 12" left or right			
Tilt adjustment	°	7.5°, 15°, 22.5° and 30° up and down			
Total swing angle	°	360			
Parking stand		Standard			

SPECIFICATIONS		NVHA-180	NVHA-210	NVHA-240
Moldboard width	ft	6'	8'	7'
Approximate weight	lb	330	391	366
Angle, tilt & offset	in	Manual or Hydraulically adjusted angle and manually tilt and offset		
Moldboard height & thickness	in	15" height, 1/4" thickness		
Cutting edge		1/2" x 6" reversible		
Maximum tractor hp	hp	60 hp (4WD)		
Hitch		3 Point CAT I		
Total swing angle	°	360°		
Offset adjustment	in	6" or 12" left or right		
Tilt adjustment	°	0 to 20 degrees up or down		

\*Tecnomec Agrícola, S.A. de C.V. reserves the right to modify the specifications whenever it deems necessary without warning.

\*Some of the pictures depict equipment that is not necessarily included as part of the standard machinery.

Contact your BISON dealer and find out the many other options available.

[www.bison.com.mx](http://www.bison.com.mx)  
01 800 52 BISON



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905  
Jesús María, Aguascalientes, México  
Tel. (449) 92-BISON / Fax. (449) 922 4767