


TECHNOLOGY THAT INCREASES PRODUCTIVITY
ROTOTILLER



RTB-U SERIES

YOUR STRONGEST ALLY

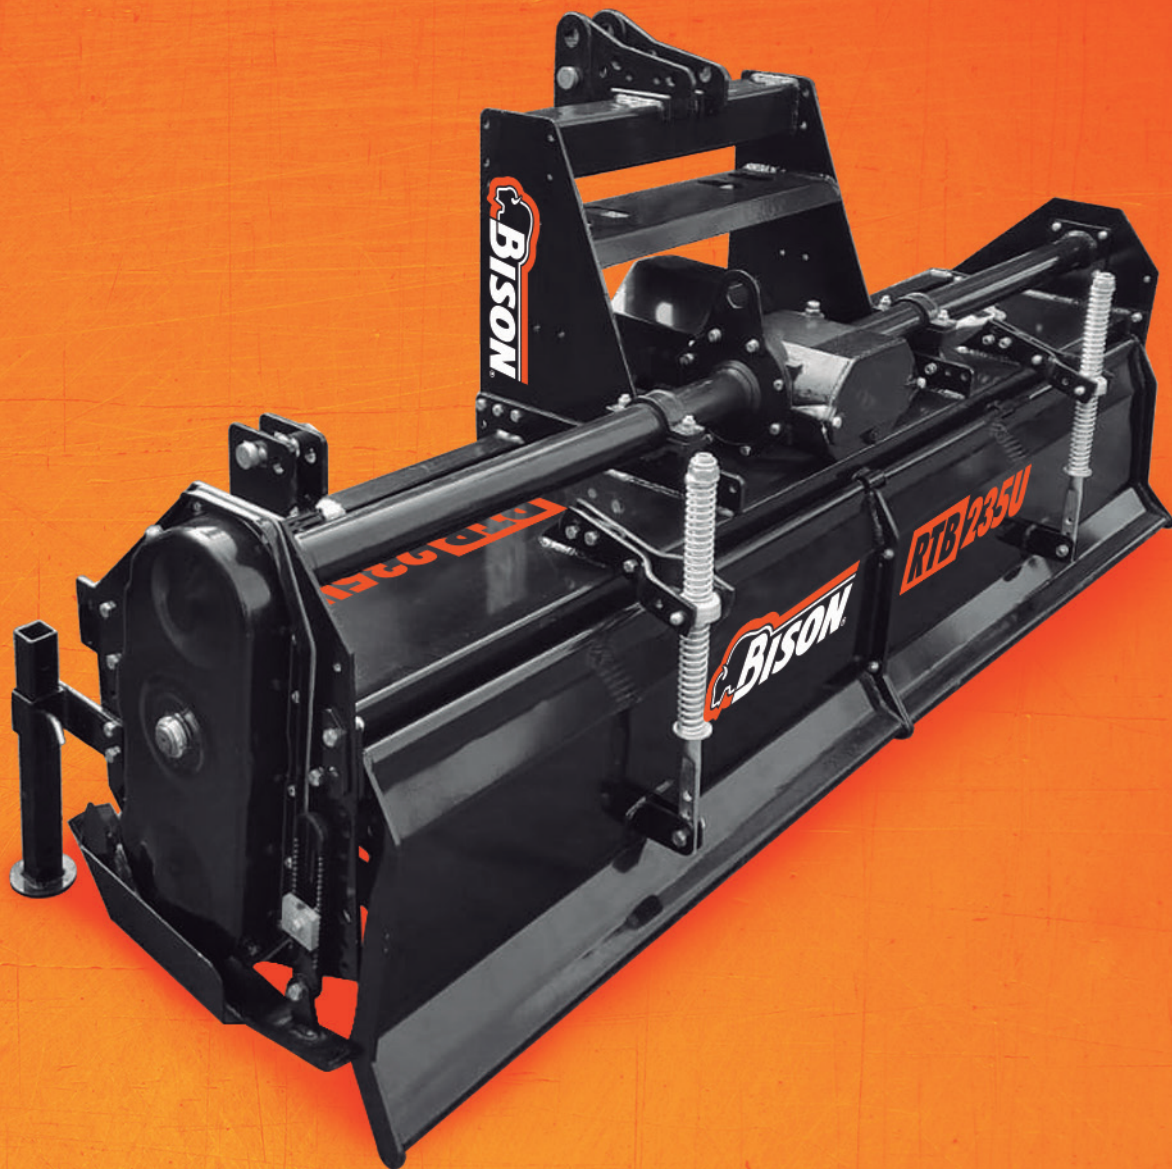



BISON

ROTOTILLER

RTB-U Series



PTO clutch protection.

Includes cardan shaft with clutch.



Helical blade distribution to normalize power demand.


Gear transmission.

Reinforced chassis.



The bolster and chassis provide stability for different working conditions, without vibrations.

The front tube strengthens and reinforces the chassis, in addition to allowing protection coupling.

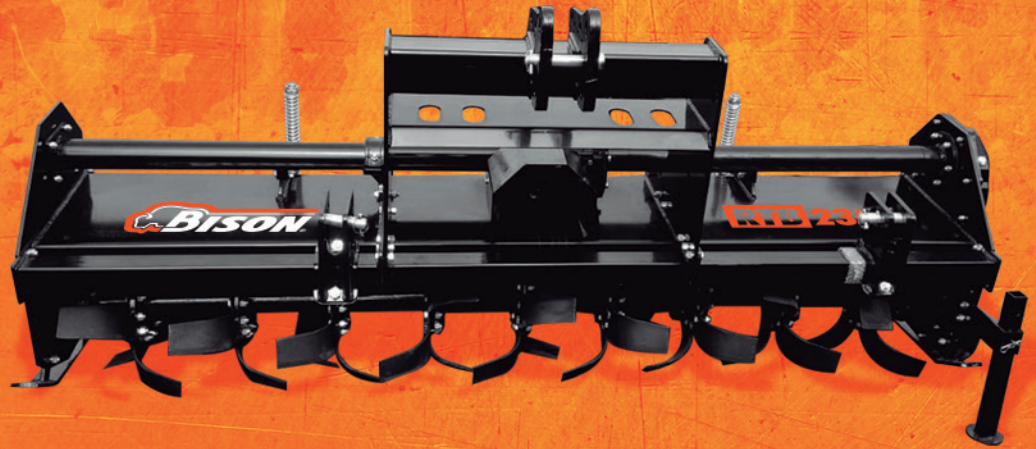

SPECIFICATIONS		RTB-185U	RTB-215U	RTB-235U
Working width	m	1.85	2.15	2.35
Power	hp	50-80	60-80	70-80
Drive	-		Gear	
GB Speed	-		Multi	
PTO protection	-		Split clutch	
Blade (pcs)	-	42	48	54
Input power	rpm	540	540	540
N. Weight	kg	486	544	601

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

bison.
com.
mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
Jesús María, Aguascalientes, México
Tel. (449) 922-4766