


TECHNOLOGY THAT INCREASES PRODUCTIVITY

ROTOTILLER

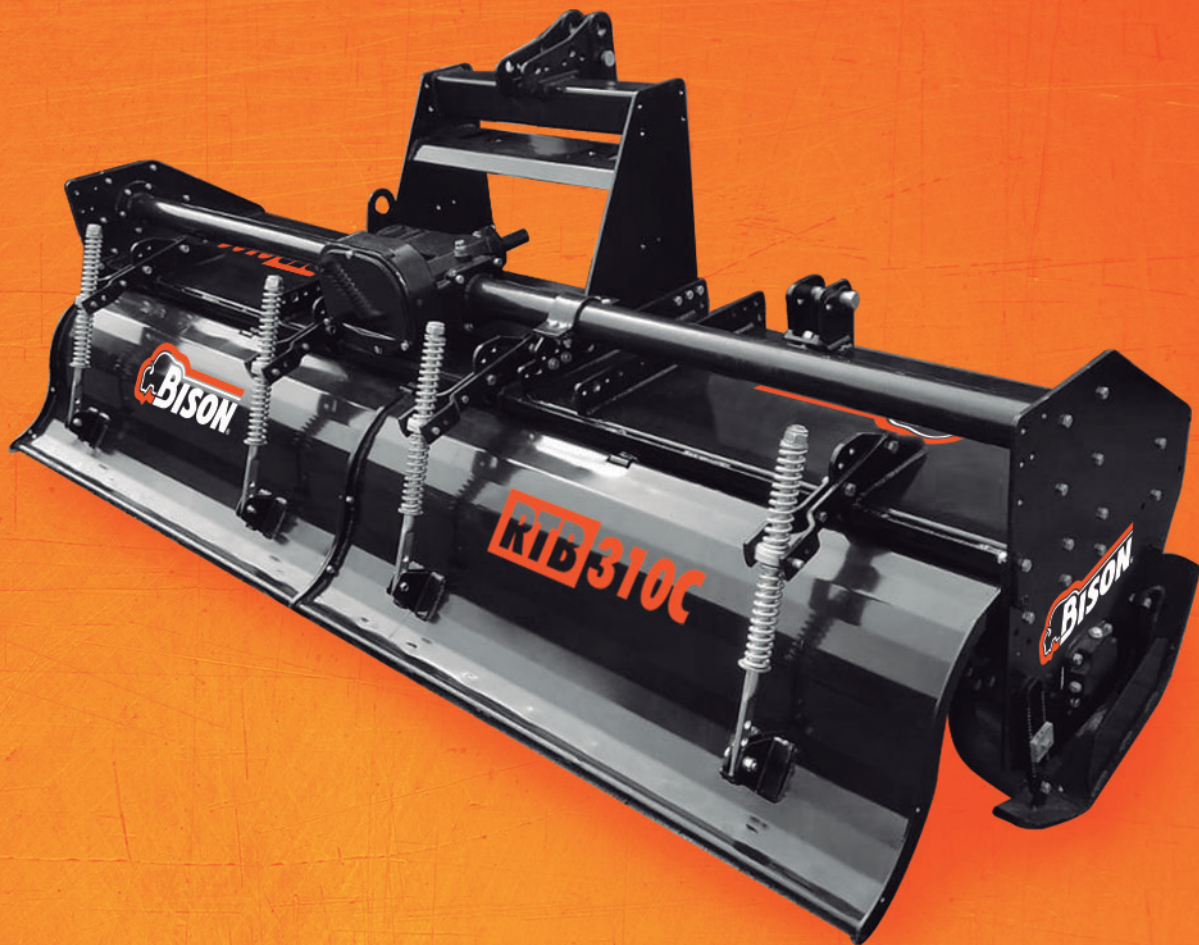

RTB-C SERIES

YOUR STRONGEST ALLY





BISON

ROTOTILLER

RTB-C Series



PTO clutch protection.
Includes cardan shaft with clutch.



Helical blade distribution to normalize power demand.


Gear transmission.

Reinforced chassis.



The bolster and chassis provide stability for different working conditions, without vibrations.

The front tube strengthens and reinforces the chassis, in addition to allowing protection coupling.

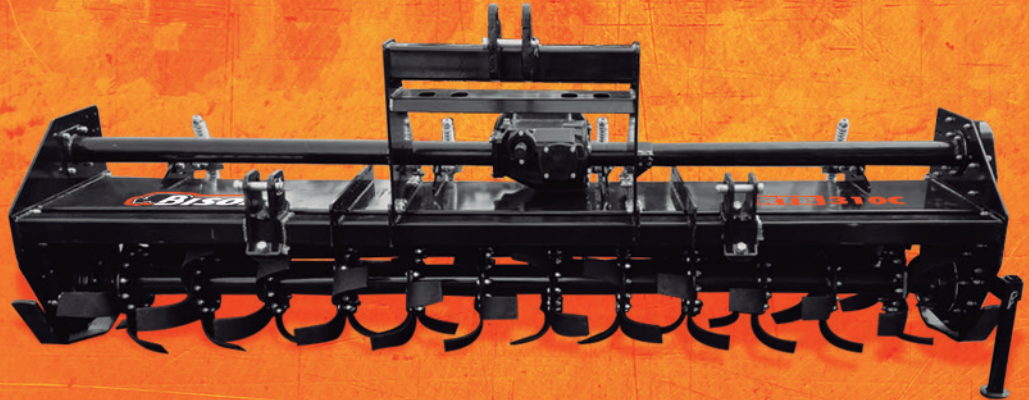

SPECIFICATIONS

| SPECIFICATIONS | | RTB-310C |
|----------------|-----|--------------|
| Working width | m | 3.10 |
| Power | hp | 100-130 |
| Drive | - | Gear |
| GB Speed | - | Multi |
| PTO protection | - | Split clutch |
| Blade (pcs) | - | 84 |
| Input power | rpm | 540 |
| N. Weight | kg | 940 |

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

bison.
com.
mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
Jesús María, Aguascalientes, México
Tel. (449) 922-4766