

TECHNOLOGY THAT INCREASES PRODUCTIVITY

FRONT END LOADER



For 75 - 120 hp tractors.

VH-DTP SERIES

YOUR STRONGEST ALLY






BISON

FRONT END LOADER

VH-DTP SERIES

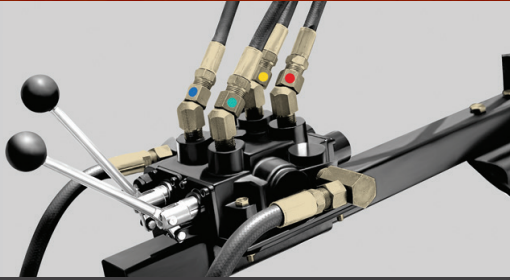

Versatile, ruggedly built for hard work and long life.

For 75 - 120 hp tractors. Designed for 2 and 4 WD tractors.

Fixed and adjustable valve stands with joystick or two lever control valve are available.

Mechanical self-leveling keeps attachments level when raising and lowering - stack round bales with ease.



High burst pressure phosphatized hydraulic steel tubing and JIC no-leak fittings are standard.

The optional single-lever control provides fast and smooth lift, lower, and dump cycles, making the loader operation faster, easier, and less fatiguing.



Attachment dump linkage provides greater attachment roll-back and dump angle. In addition, quick-attach components (except VH-900-ER) allow for easy mount and dismount in a matter of minutes.

QuickOn / QuickOff mounting to tractor is accomplished quickly and positive locking prevents movement during operation.



AVAILABLE ATTACHMENTS

| | VH-1201-DTP | VH-1501-DTP |
|---------------------|-------------|-------------|
| 1 Forklift | Yes | Yes |
| 2 Round Bale Spear | Yes | Yes |
| 3 Square Bale Spear | Yes | Yes |
| 4 Grapple Fork | Yes | Yes |
| 5 Silage Grab | Yes | Yes |

SPECIFICATIONS

| | | VH-1201-DTP | VH-1501-DTP |
|-------------------------------------|-----|-------------|-------------|
| 1 Maximum lift height | ft | 12' 4" | 12' 4" |
| 1 Clearance with bucket dumped | ft | 9' 6" | 9' 6" |
| 1 Reach at max. height | ft | 3' 6" | 3' 6" |
| Maximum dump angle | ° | 107 | 107 |
| 1 Reach with bucket on ground | ft | 7' 11" | 7' 11" |
| Bucket rollback angle | ° | 33 | 33 |
| 1 Digging depth | in | 4 | 4 |
| 1 Overall height in carry position | ft | 6' 4" | 6' 4" |
| Rollback with loader at full height | ° | 26 | 26 |
| 2 Lift capacity to full height | lbs | 2800 | 3350 |
| Lift and bucket cylinder diameter | in | 2 1/2 | 3 |
| Traction | | 2 & 4 WD | 2 & 4 WD |
| Power required | hp | 75 - 120 | 75 - 120 |

¹ May vary depending on tractor size and model.
² With 2,450 psi tractor hydraulic pressure system.

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

www.bison.com.mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
 Jesús María, Aguascalientes, México
 Tel. (449) 92-BISON / Fax. (449) 922 4767