

TECHNOLOGY THAT INCREASES PRODUCTIVITY

FRONT END LOADER



For 60 - 90 hp tractors.

VH-900 SERIES


YOUR STRONGEST ALLY





BISON

FRONT END LOADER VH-900 SERIES

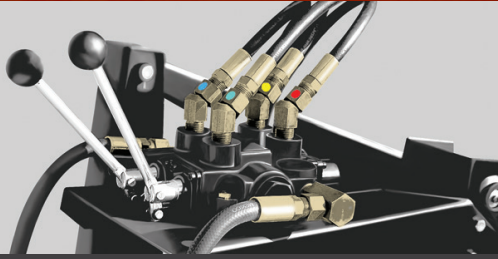

The best in value and performance: strong and rugged, the 900 Series front-end loaders are ready for hard work.

Fixed and adjustable valve stands with joystick or two lever control valve are available.


Mechanical self-leveling keeps attachments level when raising and lowering - stack round bales with ease (except VH-900 ER).



1



2

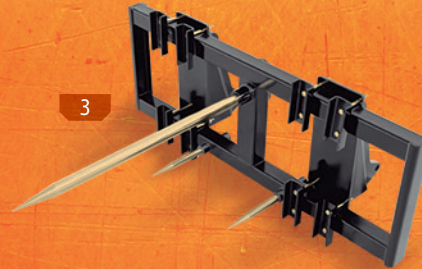

3



High burst pressure phosphatized hydraulic steel tubing and JIC no-leak fittings are standard.

For 60 a 90 hp tractors.

The optional single-lever control provides fast and smooth lift, lower, and dump cycles, making the loader operation faster, easier, and less fatiguing.



Attachment dump linkage provides greater attachment roll-back and dump angle.

Quick-attach components (except VH-900-ER) allow for easy mount and dismount in a matter of minutes.

QuickOn / QuickOff mounting to tractor is accomplished quickly and positive locking prevents movement during operation.

AVAILABLE ATTACHMENTS

| | VH-900-ER | VH-900-P | VH-902-DTP |
|----------------|-----------|----------|------------|
| 1 Silage Grab | No | No | Yes |
| 2 Grapple Fork | No | Yes | Yes |
| 3 Bale Spear | Yes | Yes | Yes |

SPECIFICATIONS

| | | VH-900-ER | VH-900-P | VH-902-DTP |
|---------------------------------------|-----|-----------|----------|------------|
| 1 Maximum lift height | ft | 10' 6" | 10' 10" | 11' |
| 1 Clearance with bucket dumped | ft | 7' 11" | 8' | 7' 11" |
| 1 Reach at max. height | ft | 1' 7" | 1' 5" | 2' 7" |
| Maximum dump angle | ° | 57 | 55 | 77 |
| 1 Reach with bucket on the ground | ft | 5' 9" | 7' 2" | 7' 3" |
| Bucket roll back angle | ° | 28 | 31 | 45 |
| 1 Digging depth | in | 3 | 4 | 6 |
| 1 Overall height in carry on position | ft | 4' 2" | 5' 11" | 6' 1" |
| Rollback with loader at full height | ° | 111 | 42 | 45.5 |
| 2 Lift capacity to full height | lbs | 2035 | 2650 | 2650 |
| Lift and bucket cylinder diameter | in | 2 1/2 | 2 1/2 | 2 1/2 |
| Traction | | 2 WD | 2 WD | 2 & 4 WD |
| Mechanical self-leveling | | | X | X |

1 May vary depending on tractor size and model.
2 With 2,450 psi tractor hydraulic pressure system.

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

www.bison.com.mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
Jesús María, Aguascalientes, México
Tel. (449) 92-BISON / Fax. (449) 922 4767