

**TECHNOLOGY THAT INCREASES PRODUCTIVITY**

**FRONT END LOADER**



For 75 - 120 hp tractors.

**VH-DTP SERIES**

**YOUR STRONGEST ALLY**






BISON

## FRONT END LOADER

### VH-DTP SERIES

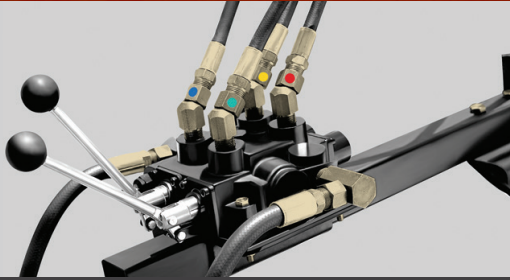

Versatile, ruggedly built for hard work and long life.

For 75 - 120 hp tractors. Designed for 2 and 4 WD tractors.

Fixed and adjustable valve stands with joystick or two lever control valve are available.

Mechanical self-leveling keeps attachments level when raising and lowering - stack round bales with ease.



High burst pressure phosphatized hydraulic steel tubing and JIC no-leak fittings are standard.

The optional single-lever control provides fast and smooth lift, lower, and dump cycles, making the loader operation faster, easier, and less fatiguing.



Attachment dump linkage provides greater attachment roll-back and dump angle. In addition, quick-attach components (except VH-900-ER) allow for easy mount and dismount in a matter of minutes.

QuickOn / QuickOff mounting to tractor is accomplished quickly and positive locking prevents movement during operation.



#### AVAILABLE ATTACHMENTS

	VH-1201-DTP	VH-1501-DTP
1 Forklift	Yes	Yes
2 Round Bale Spear	Yes	Yes
3 Square Bale Spear	Yes	Yes
4 Grapple Fork	Yes	Yes
5 Silage Grab	Yes	Yes

#### SPECIFICATIONS

		VH-1201-DTP	VH-1501-DTP
1 Maximum lift height	ft	12' 4"	12' 4"
1 Clearance with bucket dumped	ft	9' 6"	9' 6"
1 Reach at max. height	ft	3' 6"	3' 6"
Maximum dump angle	°	107	107
1 Reach with bucket on ground	ft	7' 11"	7' 11"
Bucket rollback angle	°	33	33
1 Digging depth	in	4	4
1 Overall height in carry position	ft	6' 4"	6' 4"
Rollback with loader at full height	°	26	26
2 Lift capacity to full height	lbs	2800	3350
Lift and bucket cylinder diameter	in	2 1/2	3
Traction		2 & 4 WD	2 & 4 WD
Power required	hp	75 - 120	75 - 120

<sup>1</sup> May vary depending on tractor size and model.  
<sup>2</sup> With 2,450 psi tractor hydraulic pressure system.

\* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

\* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

[www.bison.com.mx](http://www.bison.com.mx)



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905  
 Jesús María, Aguascalientes, México  
 Tel. (449) 92-BISON / Fax. (449) 922 4767