

# REAR BLADE



NVHL Series

Up to 150 hp tractors. Big blades ranging in moldboard widths from 8 to 10 feet.



NVHL-300-XHD




Rugged construction & outstanding performance.



... harvesting better products!

Superior craftsmanship and innovative designs. Our extra long boom allows full angling of moldboard without the chance of damaging tractor tires.

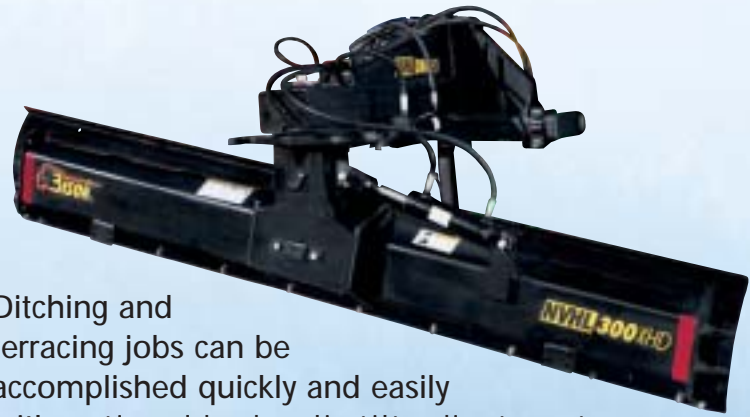

Ditching and terracing jobs can be accomplished quickly and easily with optional hydraulic tilt adjustment.

Attachments available:

360° Total swing angle. The 1/2" x 6" grader-type steel cutting edge is reversible, featuring bevels on both edges for twice the work life, and replaceable for even greater functionality.

Skid shoes increase the life of the cutting edge and avoid damaging the working surface while cleaning corrals or plowing snow.



End plates allow rear blade to hold in material for filling.



Single/Dual Tailwheel



SPECIFICATIONS		NVHL-240-XHD	NVHL-270-XHD	NVHL-300-XHD
Moldboard width	(ft)	8	9	10
Approximate weight	(lbs)	1240*/1450**	1280*/1490**	1320*/1530**
King pin diameter	(in)	4		
Moldboard height & thickness	(in)	19" x 5/16" (with full box frame)		
Cutting edge		1/2" x 6" high carbon-steel blade, reversible, interchangeable		
Maximum tractor hp	(hp)	150		
Hitch		3 - point category II, III, and III quick hitch		
Swing angle		0° to 45° left or right (manual or hydraulic) <sup>1</sup>		
Offset adjustment	(in)	0 to 32 3/8 left or right (manual or hydraulic) <sup>2</sup>		
Tilt adjustment		0° to 12° up or down (manual or hydraulic) <sup>3</sup>		
Total swing angle	(°)	360		
Parking stand		Standard		

Contact your BISON<sup>VH</sup> dealer and find out the many other options available.

\* No hydraulic cylinders nor mechanical linkages included.

\*\* Hydraulic cylinders included.

1 HYDRAULIC ANGLE KIT - includes 4" dia. x 16" stroke, 2" shaft cylinder with 2 - 8' NPT hydraulic hoses.

2 HYDRAULIC OFFSET KIT - includes 4" dia. x 16" stroke, 2" shaft cylinder with 2 - 8' NPT hydraulic hoses.

3 HYDRAULIC TILT KIT - includes 3" dia. x 4 1/2" stroke, 1 1/2" shaft cylinder with 2 - 12' NPT hydraulic hoses.

\* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

\* Some pictures show equipment that is not necessarily included as part of the standard machine.



www.bison.com.mx  
 Carretera a Paso Blanco Km.2 #400  
 Col. Vista Hermosa C.P. 20905  
 Jesús María, Aguascalientes, México  
 Tel. (52) (449) 92 - BISON  
 (52) (449) 922 - 4766  
 Fax. (52) (449) 922 - 4767