

TECHNOLOGY THAT INCREASES PRODUCTIVITY

DISC PLOW



SERIE ADB1/ADB2

YOUR STRONGEST ALLY






BISON

DISC PLOW

ADB1/ADB2 SERIES

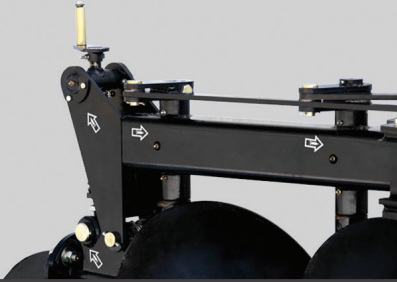

The Bison disc plow with guide-wheel fixed & guide-wheel adjustable are an implement designed to handle the rigorous work demanded by the agricultural industry.

This disc plow is user friendly, by combining two or more simple adjustments.



A main attribute is its versatility. The plow adapts to the different soil conditions and lay out of the land, to obtain the appropriate depth requirement.

Constructed with a steel frame; this plow does not have any cast parts, making it more durable under rough conditions.



Optional equipment: disc cleaners and notched disks (28" x 1/4").

Great part support provided by Bison. All assemblies and manufactured components are built in-house.

Dare to test the durability, functionality, and quality of work Bison provides with our premium products!



SPECIFICATIONS	ADB1-328H2/ADB2-328H2	ADB1-428H2/ADB2-428H2
Hitch type	CAT. II 3-point	
Number of Discs	3	4
Size of Discs	in 28 x 1/4	
Reversion	Hydraulic	
Width of Cut	in 30"	40"
Width of Track	in 58"	70"
Overall Width	in 49"	58"
Cutting Depth	cms 41	
Horizontal Angle of Discs	° 38 & 42	
Vertical Angle of Discs	° 15, 20 y 25	
Overall Length	in 88"	110"
Overall Height	in 44"	
Guide Wheel	ADB1: Adjustable / ADB2: Fixed	
Vertical Tilt Adjustment	Side Independent	
Steering angle adjustment	° 3 positions (-10°, 0° y 10°)	
Arm length adjustment	pulg 6, 6 7/8, 7 3/4, 8 5/8	
Depth Adjustment	Continuous	
Tractor Requirement	hp 65-80	80-100

* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

www.bison.com.mx



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905
Jesús María, Aguascalientes, México
Tel. (449) 92-BISON / Fax. (449) 922 4767