

**TECHNOLOGY THAT INCREASES PRODUCTIVITY**

**FRONT END LOADER**



For 60 - 90 hp tractors.

**VH-900 SERIES**

**YOUR STRONGEST ALLY**








BISON

## FRONT END LOADER VH-900 SERIES

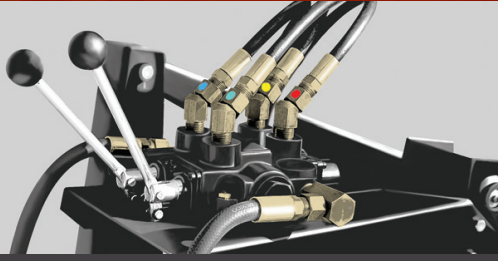

The best in value and performance: strong and rugged, the 900 Series front-end loaders are ready for hard work.

Fixed and adjustable valve stands with joystick or two lever control valve are available.


Mechanical self-leveling keeps attachments level when raising and lowering - stack round bales with ease (except VH-900 ER).




1



2

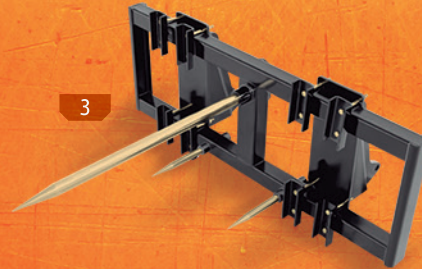

3

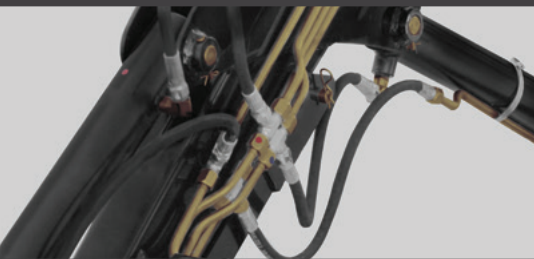

High burst pressure phosphatized hydraulic steel tubing and JIC no-leak fittings are standard.

For 60 a 90 hp tractors.

The optional single-lever control provides fast and smooth lift, lower, and dump cycles, making the loader operation faster, easier, and less fatiguing.



Attachment dump linkage provides greater attachment roll-back and dump angle.

Quick-attach components (except VH-900-ER) allow for easy mount and dismount in a matter of minutes.

QuickOn / QuickOff mounting to tractor is accomplished quickly and positive locking prevents movement during operation.

### AVAILABLE ATTACHMENTS

	VH-900-ER	VH-900-P	VH-902-DTP
1 Silage Grab	No	No	Yes
2 Grapple Fork	No	Yes	Yes
3 Bale Spear	Yes	Yes	Yes

### SPECIFICATIONS

		VH-900-ER	VH-900-P	VH-902-DTP
1 Maximum lift height	ft	10' 6"	10' 10"	11'
1 Clearance with bucket dumped	ft	7' 11"	8'	7' 11"
1 Reach at max. height	ft	1' 7"	1' 5"	2' 7"
Maximum dump angle	°	57	55	77
1 Reach with bucket on the ground	ft	5' 9"	7' 2"	7' 3"
Bucket roll back angle	°	28	31	45
1 Digging depth	in	3	4	6
1 Overall height in carry on position	ft	4' 2"	5' 11"	6' 1"
Rollback with loader at full height	°	111	42	45.5
2 Lift capacity to full height	lbs	2035	2650	2650
Lift and bucket cylinder diameter	in	2 1/2	2 1/2	2 1/2
Traction		2 WD	2 WD	2 & 4 WD
Mechanical self-leveling			X	X

1 May vary depending on tractor size and model.  
2 With 2,450 psi tractor hydraulic pressure system.

\* Tecnomec Agrícola, S.A. de C.V. reserves the right to make any changes deemed necessary to the specifications without prior notice.

\* Some pictures may include options that are not a part of the standard equipment.

Contact your BISON dealer for more info and other available options.

[www.bison.com.mx](http://www.bison.com.mx)



Carretera a Paso Blanco Km. 2 No. 400 / Col. Vista Hermosa C.P. 20905  
Jesús María, Aguascalientes, México  
Tel. (449) 92-BISON / Fax. (449) 922 4767